


Suelo_RX Pro



Uplights | 198-264 V
 1 x powerLED 8 W DC - 9 W AC | CRI 80
80574W06

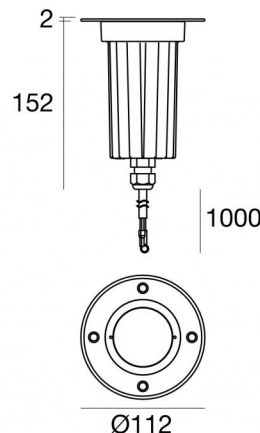

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Ultra Spot
Light emission direction	upward
Nominal power	8 W DC
Total Power	9 W
Source lumens	945 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.780 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Optics technology	Honey comb - Set-back low glare optics
Product technological characteristics	Acquastop - TVS

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Finishing flange	
Material	AISI 316L steel
Colour	steel
Processing	Brushing
Cables Electrification	
Cable connector	No



Uplights | 198-264 V | 1 x powerLED 8 W DC - 9 W AC | CRI 80 | Base 80574W06

Single emission uplights for outdoor application. The warm white LED light source with a ultra spot light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 945 lm, with a 118.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 0.780 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98122(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	48 %
Source lumens	945 lm
Delivered lumens	462 lm
Consumption	9 W
Luminaire efficacy	51 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25)

UGR

UGR axial	10.2
UGR transversal	9.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	9°
Light distribution simmetry	Symmetrical

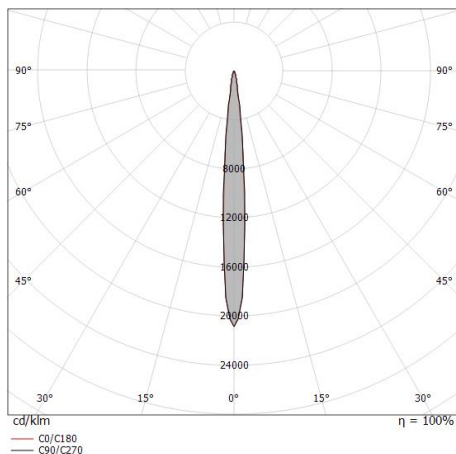

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.08 0.08	E(0°) 38527 E(C90) 4.8° 19312 E(C0) 4.6° 19419
1.0	0.12 0.16	E(0°) 9632 E(C90) 4.8° 4828 E(C0) 4.6° 4855
1.5	0.25 0.24	E(0°) 4281 E(C90) 4.8° 2146 E(C0) 4.6° 2158
2.0	0.34 0.32	E(0°) 2408 E(C90) 4.8° 1207 E(C0) 4.6° 1214
2.5	0.42 0.40	E(0°) 1541 E(C90) 4.8° 772 E(C0) 4.6° 777
3.0	0.50 0.48	E(0°) 1070 E(C90) 4.8° 536 E(C0) 4.6° 539



Suelo_RX Pro | Uplights | Accessories
80574W06



Outer casing

installation position: floor, land; type of installation: masonry L=110mm, H=220mm,
D=110mm.

Material:ABS Plastic, colour:black.

Code

98122