




Uplights | 1 arrayLED 9 W DC 24 V | CRI 80  
81202N15

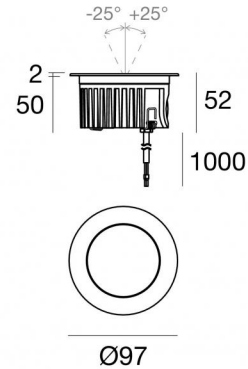

Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	upward
Nominal power	9 W DC
Source lumens	1313 lm
Input voltage range	24 V
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	No
Directional	No
Tilting	Yes
total angle (vertical plane)	50 °
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.5 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

### Electronics

- 
**89179**  
On/Off Driver 198~264V AC 24 W (1 - 2 art.)
- 
**89359**  
On/Off Driver 198~264V AC / 180~275V DC 48 W (1 - 5 art.)
- 
**99331**  
On/Off Driver 198~264V AC / 180~275V DC 150 W (1 art.)
- 
**99660**  
DALI - 1-10V Controller 24V DC 216 W (1 art.)
- 
**C-E500023**  
DALI - 1-10V - Push and Simply Dim Controller 8~53V DC 576 W (1 art.)

### Cables Electrification

Cable connector	No
-----------------	----

## Uplights | 1 arrayLED 9 W DC 24 V | CRI 80 | Base 81202N15

Single emission uplights for outdoor application. The natural white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1313 lm, with a 145.9 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP68; the total weight is of 0.5 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99651 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	76 %
Source lumens	1313 lm
Delivered lumens	1003 lm
Consumption	9 W
Luminaire efficacy	111 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

UGR axial	13.4
UGR transversal	13.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL


C0/C180 optics	15°
Light distribution simmetry	Symmetrical

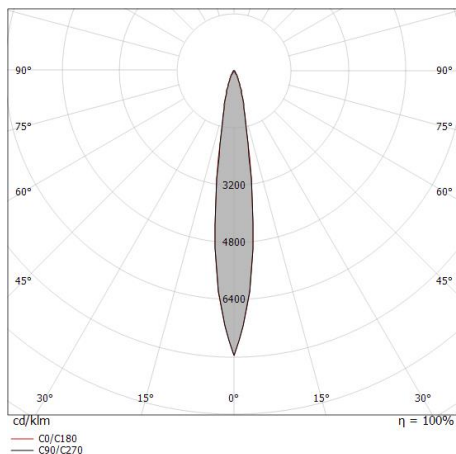

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	0.13	31961	7.4° 15772	7.5° 15577
1.0	0.26	7990	7.4° 3943	7.5° 3894
1.5	0.39	3551	7.4° 1752	7.5° 1731
2.0	0.52	1998	7.4° 986	7.5° 974
2.5	0.65	1278	7.4° 631	7.5° 623
3.0	0.78	888	7.4° 438	7.5° 433

— C0/C180 (Half-peak divergence: 15.0°)  
— C90/C270 (Half-peak divergence: 14.8°)





**Outer casing**

installation position: floor, land; type of installation: masonry L=114mm, H=76mm,  
D=114mm.

Material:ABS Plastic, colour:black.

**Code**

99651