


Alux Pro



Ceiling Downlights | 198-264 V
32 topLED 65 W DC - 70 W AC | CRI 80
81776N69

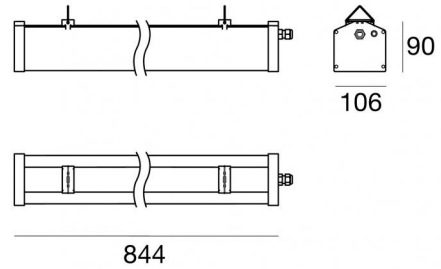

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Double Asymmetric
Light emission direction	downward
Nominal power	65 W DC
Total Power	70 W
Source lumens	10538 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	3.2 Kg
Electrostatic discharge protection	Yes
Surge protection	5 KV

Finishing casing

Material	Aluminium 6060
Colour	Anodised Aluminum
Processing	20 µm anodizing

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Ceiling Downlights | 198-264 V | 32 topLED 65 W DC - 70 W AC | CRI 80 | Base 81776N69

Energy efficiency class

This product contains 2 light sources of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	88 %
Source lumens	10538 lm
Delivered lumens	9297 lm
Consumption	70 W
Luminaire efficacy	132 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C10 108000h (at Tj 65 Ta 25)

UGR

UGR axial	24.4
UGR transversal	27.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	76°
C0/C180 optics	121°
Light distribution simmetry	Symmetrical 2 assis


Single emission ceiling downlights for outdoor application. The natural white LED light source with a double asymmetric light distribution is composed of 32 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 10538 lm, with a 162.1 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 3.2 kg.

The total absorbed power is 70 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

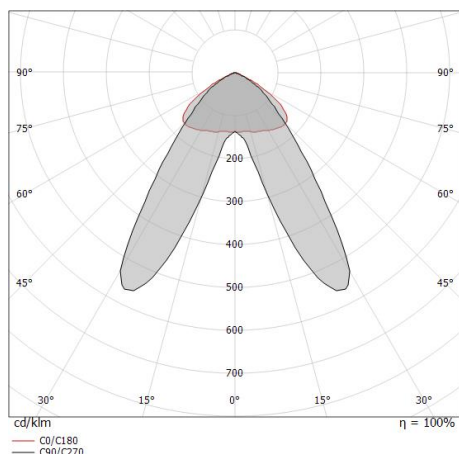

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.78 1.76	E(0°) 5102 E(C90) 38.1° 5146 E(C0) 60.4° 374
1.0	1.57 3.52	E(0°) 1275 E(C90) 38.1° 1286 E(C0) 60.4° 94
1.5	2.35 5.28	E(0°) 567 E(C90) 38.1° 572 E(C0) 60.4° 42
2.0	3.14 7.04	E(0°) 319 E(C90) 38.1° 322 E(C0) 60.4° 23
2.5	3.92 8.80	E(0°) 204 E(C90) 38.1° 206 E(C0) 60.4° 15
3.0	4.70 10.56	E(0°) 142 E(C90) 38.1° 143 E(C0) 60.4° 10

— C0/C180 (Half-peak divergence: 120.8°)
— C90/C270 (Half-peak divergence: 76.2°)



Connector

Type of cable power cable; ; insulation single; section 1 mm²; cable gland: yes; colors: blue - brown - yellow-green.

Code

99737



Cable

Type of cable power cable; Length 1000 mm; insulation single; section 1 mm²; cable gland: pg7; colors: blue - brown - yellow-green.

Code

84863