




Uplights | 198-264 V AC /--- V DC
1 arrayLED 8 W DC - 9 W AC | CRI 80
82267W35

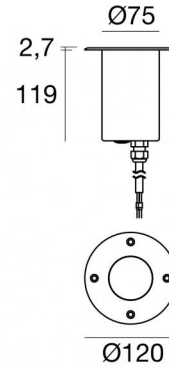

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	upward
Nominal power	8 W DC
Total Power	9 W
Source lumens	945 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP68
Installation limitations	Not for underwater use
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	2.5 Kg
Electrostatic discharge protection	Yes
Surge protection	4 KV
Product technological characteristics	Acquastop

Finishing casing

Material	OT58 brass
Colour	Raw Brass

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

Finishing flange

Material	OT58 brass
Colour	Raw Brass

Cables Electrification

Cable connector	No
-----------------	----

The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power systems.



Uplights | 198-264 V AC /--- V DC | 1 arrayLED 8 W DC - 9 W AC | CRI 80 | Base
82267W35

Single emission uplights for outdoor application. The warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 945 lm, with a 118.1 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a raw brass finish; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 2.5 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 84900(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	89 %
Source lumens	945 lm
Delivered lumens	846 lm
Consumption	9 W
Luminaire efficacy	94 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	8.1
UGR transversal	8.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL


C0/C180 optics	25°
Light distribution simmetry	Symmetrical

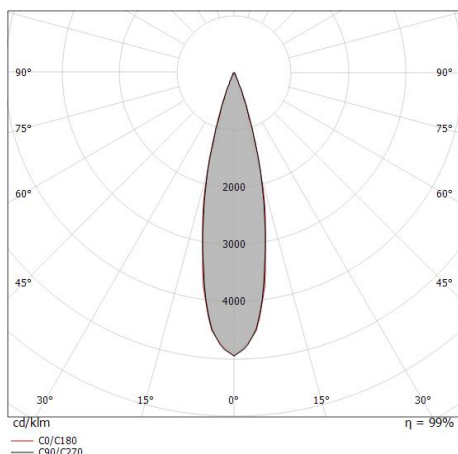

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.22 0.22	E(0°) 16726 E(C90) 12.3° 7817 E(C0) 12.5° 7800
1.0	0.44 0.44	E(0°) 4182 E(C90) 12.3° 1954 E(C0) 12.5° 1950
1.5	0.65 0.67	E(0°) 1858 E(C90) 12.3° 869 E(C0) 12.5° 867
2.0	0.87 0.88	E(0°) 1045 E(C90) 12.3° 489 E(C0) 12.5° 488
2.5	1.09 1.11	E(0°) 669 E(C90) 12.3° 313 E(C0) 12.5° 312
3.0	1.31 1.33	E(0°) 465 E(C90) 12.3° 217 E(C0) 12.5° 217

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 25.0°)
— C90/C270 (Half-peak divergence: 24.6°)

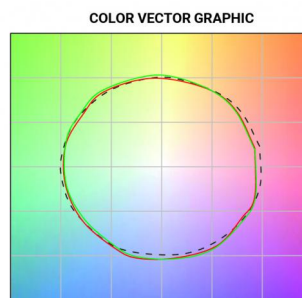



Suelo_Brass | Uplights | Accessories
82267W35



Outer casing

installation position: floor, land; type of installation: masonry L=220mm, H=110mm,
D=110mm.

Material:ABS Plastic, colour:black.

Code

84900