




Uplights | 1 arrayLED 8 W DC 220 mA | CRI 80
82669M30



Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	upward
Nominal power	8 W DC
Source lumens	1080 lm
Input voltage range	220mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.5 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Electronics



99342
On/Off Driver 198-264V AC (1 art.)

Cables Electrification

Cable connector	No
-----------------	----



Uplights | 1 arrayLED 8 W DC 220 mA | CRI 80 | Base 82669M30

Single emission uplights for outdoor application. The super warm white LED light source is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1080 lm, with a 135.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP68; the total weight is of 0.5 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 83039(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	63 %
Source lumens	1080 lm
Delivered lumens	690 lm
Consumption	8 W
Luminaire efficacy	86 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	8.6
UGR transversal	8.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	29°
Light distribution simmetry	Symmetrical

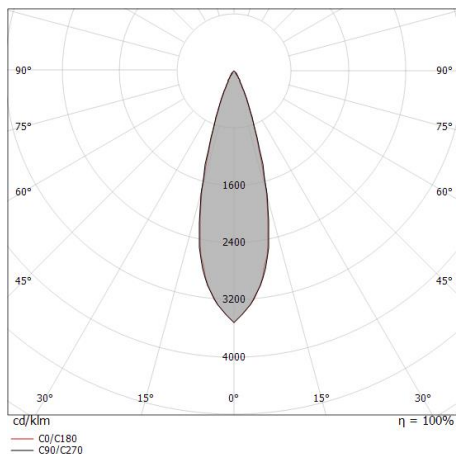


Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.27 0.26	E(0°) 9704 E(C90) 15.0° 4409 E(C0) 14.7° 4429
1.0	0.54 0.52	E(0°) 2426 E(C90) 15.0° 1102 E(C0) 14.7° 1107
1.5	0.80 0.79	E(0°) 1078 E(C90) 15.0° 490 E(C0) 14.7° 492
2.0	1.07 1.05	E(0°) 607 E(C90) 15.0° 276 E(C0) 14.7° 277
2.5	1.34 1.31	E(0°) 388 E(C90) 15.0° 176 E(C0) 14.7° 177
3.0	1.61 1.57	E(0°) 270 E(C90) 15.0° 122 E(C0) 14.7° 123

— C0/C180 (Half-peak divergence: 29.4°)
— C90/C270 (Half-peak divergence: 30.0°)





Orma_F | Uplights | Accessories
82669M30



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=88mm, D=87mm.

Material:ABS Plastic, colour:black.

Code

99923



Outer casing

installation position: floor, land; type of installation: masonry L=114mm, H=88mm,
D=114mm.

Material:ABS Plastic, colour:black.

Code

83039