




Uplights | 1 arrayLED 13 W DC 24 V | CRI 80  
82688N15



Technical data	
Type	Walk Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	upward
Nominal power	13 W DC
Source lumens	1854 lm
Input voltage range	24 V
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
C.V. - C.C. Converter	Converter 24V included
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.9 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Dark light
Product technological characteristics	Acquastop

#### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

#### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

#### Electronics



89179  
On/Off Driver 198~264V AC 24 W (1 art.)



89359  
On/Off Driver 198~264V AC / 180~275V DC 48 W (1 - 3 art.)



99331  
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)



99660  
DALI - 1-10V Controller 24V DC 216 W (1 art.)



C-E500023  
DALI - 1-10V - Push and Simply Dim Controller 8~53V DC 576 W (1 art.)

#### Cables Electrification

Cable connector	No
-----------------	----



**Uplights | 1 arrayLED 13 W DC 24 V | CRI 80 | Base 82688N15**

Single emission uplights for outdoor application. The natural white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1854 lm, with a 142.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP68; the total weight is of 0.9 kg.

The total absorbed power is 13 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 83040(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**

This product contains a light source of energy efficiency class D.

**Illuminotechnical Features**


Light Output Ratio (LOR)	65 %
Source lumens	1854 lm
Delivered lumens	1210 lm
Consumption	13 W
Luminaire efficacy	93 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

**LED Life / Failure Ratio**

L70 B10 C0 296960h (at Tj 65 Ta 25 )

**OPTICAL**



C0/C180 optics	13°
Light distribution symmetry	Asymmetrical

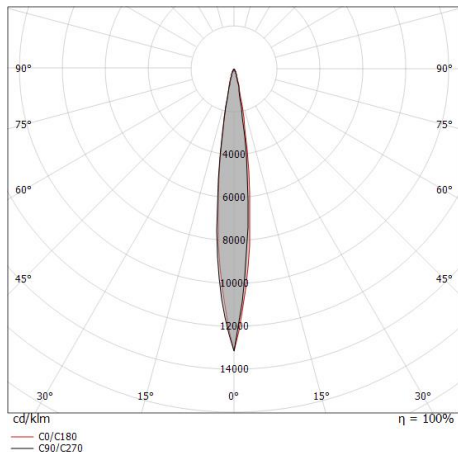

0.5	0.11	E(0°) E(C0)	6.4°	63571 31374
1.0	0.22	E(0°) E(C0)	6.4°	15893 7844
1.5	0.34	E(0°) E(C0)	6.4°	7063 3486
2.0	0.45	E(0°) E(C0)	6.4°	3973 1961
2.5	0.56	E(0°) E(C0)	6.4°	2543 1255
3.0	0.67	E(0°) E(C0)	6.4°	1766 872

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 12.8°)

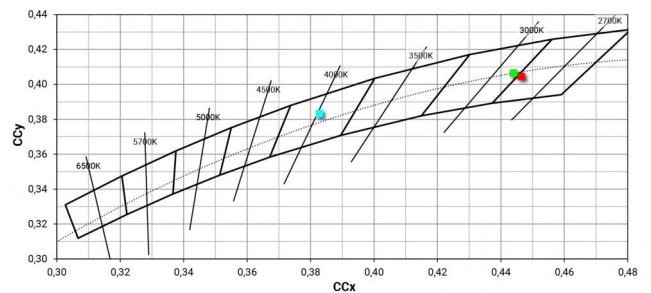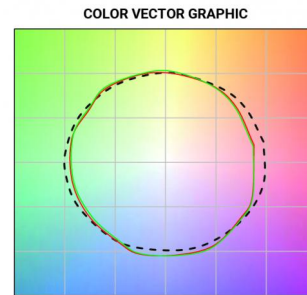



Outer casing

installation position: floor, land; type of installation: masonry L=127mm, H=88mm,  
 D=127mm.

Material:ABS Plastic, colour:black.

**Code**

99924



Outer casing

installation position: floor, land; type of installation: masonry L=127mm, H=88mm,  
 D=127mm.

Material:ABS Plastic, colour:black.

**Code**

83040