


# Beret\_2Q



Uplights | 100-250 V  
1 x powerLED 1.6 W DC - 3 W AC | CRI 80  
**83706W00**

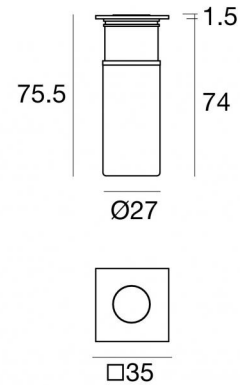

## Technical data

Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	upward
Nominal power	1.6 W DC
Total Power	3 W
Source lumens	249 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	100 - 250 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP67
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.180 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes
Product technological characteristics	Acquastop

## Finishing casing

Material	Brass
Colour	nickel
Processing	Brushing



Uplights | 100-250 V | 1 x powerLED 1.6 W DC - 3 W AC | CRI 80 | Base 83706W00

Single emission uplights for outdoor application. The warm white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 249 lm, with a 155.6 lm/W nominal luminous efficacy.

The device body is made of brass and features a nickel finish, processed by means of brushing. The ingress protection degree is IP67; the total weight is of 0.180 kg.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	18 %
Source lumens	249 lm
Delivered lumens	45 lm
Consumption	3 W
Luminaire efficacy	15 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	50°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	30.6
UGR transversal	30.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	104°
Light distribution simmetry	Symmetrical

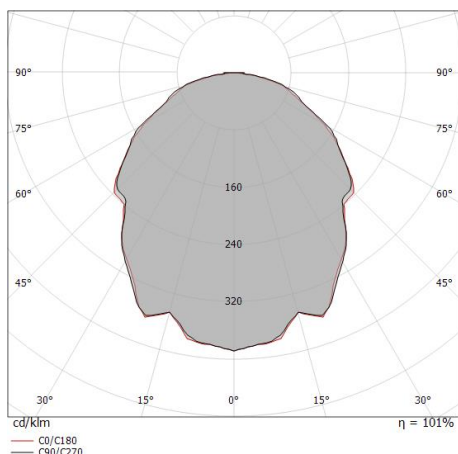

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.28	69	51.9°	52.1°	8
1.0	2.55	17	51.9°	52.1°	2
1.5	3.83	8	51.9°	52.1°	1
2.0	5.10	4	51.9°	52.1°	0
2.5	6.38	3	51.9°	52.1°	0
3.0	7.65	2	51.9°	52.1°	0

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 104.2°)  
 - - C90/C270 (Half-peak divergence: 103.8°)



Beret\_2Q | Uplights | Accessories  
**83706W00**



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84918