


Shaker



Projectors | 176-264 V AC /230-280 V DC
1 x powerLED 2 W DC - 3 W AC | CRI 80
84244W30

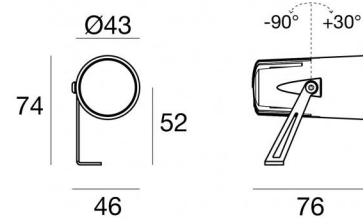

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Medium Flood
Light emission direction	frontal
Nominal power	2 W DC
Total Power	3 W
Source lumens	249 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	176 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP66
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	120 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.12 Kg
Electrostatic discharge protection	Yes
Surge protection	0.5 KV
Product technological characteristics	Acquastop

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Dark brown
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

Finishing bracket

Material	AISI 304 steel
Colour	Dark brown
Processing	Powder coating

Cables Electrification

Cable connector	No
-----------------	----

The driver contained in the device complies with IEC 61347-2-13 annex J₁ and can therefore be powered by centralized power systems.

Projectors | 176-264 V AC /230-280 V DC | 1 x powerLED 2 W DC - 3 W AC | CRI 80 | Base
84244W30


Single emission projectors for outdoor application. The warm white LED light source with a medium flood light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 249 lm, with a 124.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP66; the total weight is of 0.12 kg.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

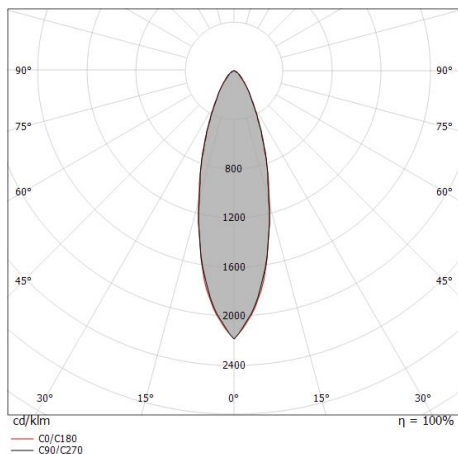

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.27 0.27	E(0°) 1650 E(C90) 748 E(C0) 745
1.0	0.54 0.54	E(0°) 412 E(C90) 187 E(C0) 186
1.5	0.80 0.81	E(0°) 183 E(C90) 83 E(C0) 83
2.0	1.07 1.08	E(0°) 103 E(C90) 47 E(C0) 47
2.5	1.34 1.35	E(0°) 66 E(C90) 30 E(C0) 30
3.0	1.61 1.62	E(0°) 46 E(C90) 21 E(C0) 21

— C0/C180 (Half-peak divergence: 30.2°)
 — C90/C270 (Half-peak divergence: 30.0°)

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

Light Output Ratio (LOR)	75 %
Source lumens	249 lm
Delivered lumens	189 lm
Consumption	3 W
Luminaire efficacy	63 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	50°C

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)

UGR

UGR axial	23.3
UGR transversal	23.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	30°
Light distribution simmetry	Symmetrical




Shaker | Projectors | Accessories
84244W30




Picket - L. 160mm
installation position: land,Cover material: aisi 304 steel

Code
98624




Picket - L. 102.5mm
installation position: land,Cover material: aisi 304 steel

Code
98669



Picket - L. 700mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500002



Picket - L. 1000mm
installation position: land,Cover material: aisi 304 steel

Code
C-F500003



Anti-glare
Anti-glare Type: 45° cylindrical screen.
Material:Aluminium 6026, colour:Black, processing:Open pore anodizing + Powder Coating.

Code
83246