





Downlights | 1 arrayLED 11 W DC 300 mA | CRI 90  
**C00184WHMWF**



□ 90

## Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Wide Flood
Light emission direction	downward
Nominal power	11 W DC
Source lumens	1487 lm
Input voltage range	300mA
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Optical compartment IP	IP65
IK	IK05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (vertical plane)	60 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.15 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.3 Kg
Electrostatic discharge protection	No
Surge protection	No

## Finishing casing

Material	UV Resistant Polycarbonate
Colour	White
Processing	Liquid painting


## Finishing diffuser


Material	UV Resistant Polycarbonate
Colour	transparent

## Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Processing	Tumbling

## Electronics

 99734  
Multi Power 198~264V AC / 180~275V DC

 99732  
1-10V Multi Power 198~264V AC / 180~275V DC

 83322  
Push and Simply Dim - DALI-2 Controller



Downlights | 1 arrayLED 11 W DC 300 mA | CRI 90 | Base  
**C00184WHMWF**


Single emission recessed downlights for indoor application. The super warm white LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1487 lm, with a 135.2 lm/W nominal luminous efficacy.

The device body is made of uv resistant polycarbonate and features a white finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.3 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 11 W. The power supply cable is included and features a 0.15 m length.

The device features protection class III and can be ceiling-mounted, with a 81 x 81 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

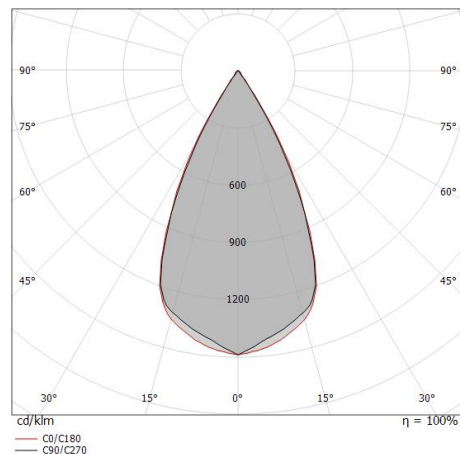

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.49 0.50	E(0°) 5183 E(C90) 26.0° 1896 E(C0) 26.4° 1868
1.0	0.98 0.99	E(0°) 1296 E(C90) 26.0° 474 E(C0) 26.4° 467
1.5	1.46 1.49	E(0°) 576 E(C90) 26.0° 211 E(C0) 26.4° 208
2.0	1.95 1.98	E(0°) 324 E(C90) 26.0° 119 E(C0) 26.4° 117
2.5	2.44 2.48	E(0°) 207 E(C90) 26.0° 76 E(C0) 26.4° 75
3.0	2.93 2.98	E(0°) 144 E(C90) 26.0° 53 E(C0) 26.4° 52

— C0/C180 (Half-peak divergence: 52.8°)  
— C90/C270 (Half-peak divergence: 52.0°)

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	58 %
Source lumens	1487 lm
Delivered lumens	872 lm
Consumption	11 W
Luminaire efficacy	79 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

### UGR

UGR axial	14.4
UGR transversal	14.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	52°
Light distribution simmetry	Symmetrical

