





Ceiling Downlights | 180-264 V AC /230-280 V DC
1 arrayLED 6.5 W DC - 7.5 W AC | CRI 80

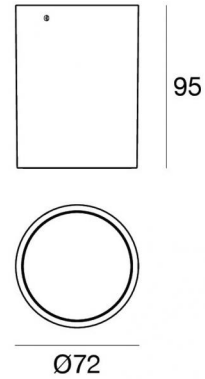

C00467BBNWF

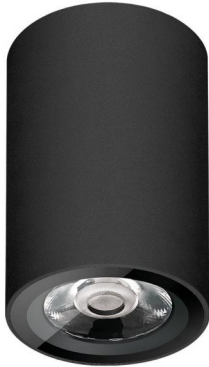

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Wide Flood
Light emission direction	downward
Nominal power	6.5 W DC
Total Power	7.5 W
Source lumens	990 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	180 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP65
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.578 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Optics technology	Set-back low glare optics

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening



Ceiling Downlights | 180-264 V AC /230-280 V DC | 1 arrayLED 6.5 W DC - 7.5 W AC | CRI 80 | Base C00467BBNWF


Single emission ceiling downlights for outdoor application. The natural white LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 990 lm, with a 152.3 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 0.578 kg.

The total absorbed power is 7.5 W.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

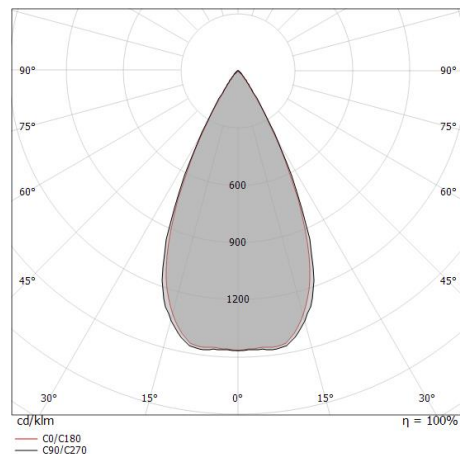

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.48 0.47	E(0°) 4170 E(C90) 25.6° 1539 E(C0) 25.1° 1551
1.0	0.96 0.94	E(0°) 1042 E(C90) 25.6° 385 E(C0) 25.1° 388
1.5	1.44 1.41	E(0°) 463 E(C90) 25.6° 171 E(C0) 25.1° 172
2.0	1.92 1.87	E(0°) 261 E(C90) 25.6° 96 E(C0) 25.1° 97
2.5	2.40 2.34	E(0°) 167 E(C90) 25.6° 62 E(C0) 25.1° 62
3.0	2.87 2.81	E(0°) 116 E(C90) 25.6° 43 E(C0) 25.1° 43

— C0/C180 (Half-peak divergence: 50.2°)
— C90/C270 (Half-peak divergence: 51.2°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	71 %
Source lumens	990 lm
Delivered lumens	711 lm
Consumption	7.5 W
Luminaire efficacy	94 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	17
UGR transversal	17
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	50°
Light distribution simmetry	Symmetrical