


Periskop80



Projectors | 198-264 V
1 arrayLED 9.5 W DC - 11.5 W AC | CRI 80
C00487BBASP

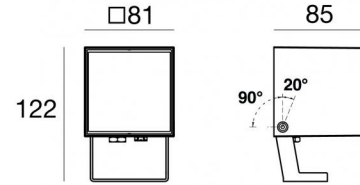

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Spot
Light emission direction	frontal
Nominal power	9.5 W DC
Total Power	11.5 W
Source lumens	1011 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2200 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	110 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Product technological characteristics	TCS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating



Projectors | 198-264 V | 1 arrayLED 9.5 W DC - 11.5 W AC | CRI 80 | Base
C00487BBASP

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	77 %
Source lumens	1011 lm
Delivered lumens	785 lm
Consumption	11.5 W
Luminaire efficacy	68 lm/W
Colour temperature	2200 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	10.6
UGR transversal	10.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	15°
Light distribution simmetry	Symmetrical


Single emission projectors for outdoor application. The ancient white LED light source with a spot light distribution is composed of 1 arrayed LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 1011 lm, with a 106.4 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 1 kg.

The total absorbed power is 11.5 W. The power supply cable is included and features a 1 m length.


The device features protection class I and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

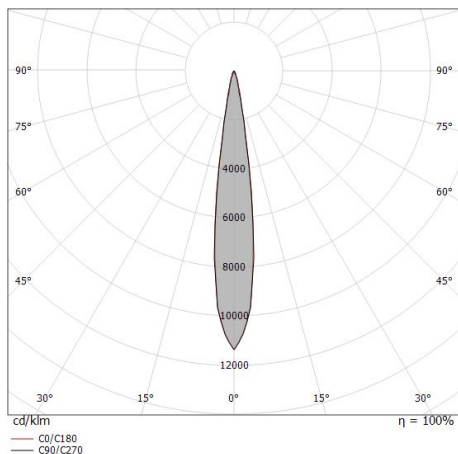


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.13 0.13	E(0°) 35687 E(C90) 7.5° 17481 E(C0) 7.4° 17540
1.0	0.26 0.26	E(0°) 8922 E(C90) 7.5° 4370 E(C0) 7.4° 4385
1.5	0.39 0.39	E(0°) 3965 E(C90) 7.5° 1942 E(C0) 7.4° 1949
2.0	0.52 0.52	E(0°) 2230 E(C90) 7.5° 1093 E(C0) 7.4° 1096
2.5	0.66 0.66	E(0°) 1427 E(C90) 7.5° 699 E(C0) 7.4° 702
3.0	0.79 0.78	E(0°) 991 E(C90) 7.5° 486 E(C0) 7.4° 487

— C0/C180 (Half-peak divergence: 14.8°)
— C90/C270 (Half-peak divergence: 15.0°)




Anti-glare
Anti-glare Type: snoot.
Material:Aluminium 6060, colour:Black, processing:Open pore anodizing + Powder Coating.

Code
C-U300026



Anti-glare
Anti-glare Type: eyelid.
Material:AISI 304 steel, colour:Black, processing:Powder coating.

Code
C-U300023



Picket
installation position: land,Cover material: pc

Code
98549



Bag / Fixing kit - Belt for installation on tree

Code
99802