


Ribbon HE 160 LEDs/m



LED Strip | 1 topLED 60 W DC 24 V | 12 W/m

1640 Lm/m | CRI 83+

C00506WHNDI

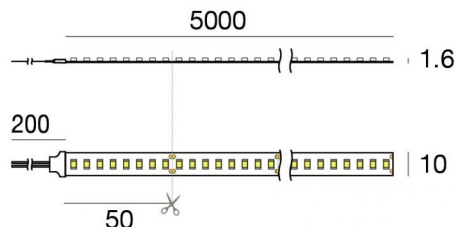

Technical data

Length	5000 mm
Minimum cut	50 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	60 W DC
Power / m	12 W / m
Source lumens	8200 lm
Source lumens / m	1640 lm / m
Input voltage range	24V
CCT / Tone	4000 K
Colour rendering index	83+ Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.36 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Technopolymer
Colour	white

Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 2 art.)
	99332 1-10V Controller (1 - 2 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)
	83333 Push and Simply Dim - DALI-2 Controller (1 - 2 art.)
	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 4 art.)

Ribbon HE 160 LEDs/m



LED Strip | 1 topLED 60 W DC 24 V | 12 W/m | 1640 Lm/m | CRI 83+ | Base C00506WHNDI

Single emission led strip for indoor application. The natural white LED light source with a diffused light distribution is composed of 800 stripled LEDs with CCT of 4000 K and a CRI 83+; the source luminous flux is 8200 lm, with a 136.7 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish. The ingress protection degree is IP20; the total weight is of 0.36 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 60 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class



This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	100 %
Source lumens	8200 lm
Delivered lumens	8200 lm
Consumption	60 W
Luminaire efficacy	136 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +45°C

LED Life / Failure Ratio


L70 B50 C0 50000h

UGR

UGR axial	30.1
UGR transversal	32.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	117°
C0/C180 optics	134°
Light distribution simmetry	Symmetrical 2 assis

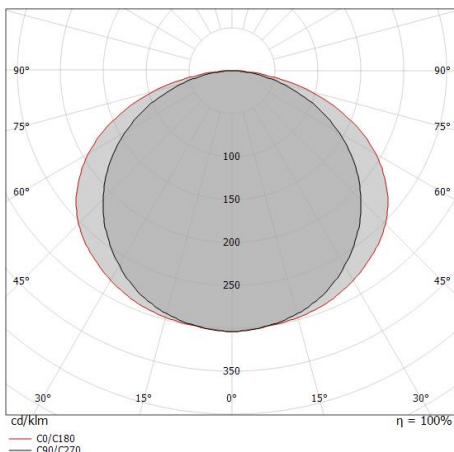

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.62 2.36	E(0°) 9972 E(C90) 726 E(C0) 298
1.0	3.24 4.71	E(0°) 2493 E(C90) 181 E(C0) 74
1.5	4.86 7.07	E(0°) 1108 E(C90) 81 E(C0) 33
2.0	6.48 9.42	E(0°) 623 E(C90) 45 E(C0) 19
2.5	8.10 11.78	E(0°) 399 E(C90) 29 E(C0) 12
3.0	9.71 14.14	E(0°) 277 E(C90) 20 E(C0) 8








— C0/C180 (Half-peak divergence: 134.0°)
— C90/C270 (Half-peak divergence: 116.6°)

Ribbon HE 160 LEDs/m



LED Strip | 1 topLED 60 W DC 24 V | 12 W/m | 1640 Lm/m | CRI 83+
C00506WHNDI

Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Fylo+ Recessed_2	Code <u>65006 - 65007</u>

Ribbon HE 160 LEDs/m



LED Strip | 1 topLED 60 W DC 24 V | 12 W/m | 1640 Lm/m | CRI 83+
C00506WHNDI

Components

		Fylo+ Recessed_1	Code <u>65027 - 65028</u>
		Fylo+ Recessed_3	Code <u>65003 - 65004</u>
		Fylo+ Recessed_4	Code <u>65010 - 65009</u>
		Fylo+ Surface_1	Code <u>65015 - 65016</u>
		Fylo+ Surface_2	Code <u>65018 - 65019</u>
		Fylo+ Surface_3	Code <u>65021 - 65022</u>
		Fylo+ Surface_4	Code <u>65024 - 65025</u>
		Fylo+ Recessed_5	Code <u>65013 - 65012</u>

Ribbon HE 160 LEDs/m



LED Strip | 1 topLED 60 W DC 24 V | 12 W/m | 1640 Lm/m | CRI 83+
C00506WHNDI

Components



Fylo+ Direct_1

















Code

65180 - 65181

Ribbon HE 160 LEDs/m



















Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI

 <p>5x</p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p>Code <u>98420</u></p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>98395</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98941</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98942</u></p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p>Code <u>98943</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98898</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98899</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98900</u></p>

Ribbon HE 160 LEDs/m



Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI

		Diffuser		Code 98917
		Diffuser		Code 98925
		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200002
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005

Ribbon HE 160 LEDs/m



Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI




Diffuser
 Material:PC, colour:opaline.

Finish
 Opaline **Code**
 C-K200007



Diffuser
 Material:PC, colour:black.

Finish
 Black **Code**
 C-K200009



Closing cap

Code
 98418



Closing cap - Closing cap
 Material:PC, colour:white.

Code
 98892



Closing cap

Code
 98928



Closing cap

Code
 98896



Closing cap

Code
 98902




Closing cap
 Material:Aluminium, colour:translucent.

Code
 98907

Ribbon HE 160 LEDs/m




Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI




Closing cap
Material:PC, colour:white.

Code
98922




Closing cap
Material:PC, colour:white.

Code
98918




Closing cap
Material:PC, colour:black.

Code
83133





Closing cap
Material:plastic, colour:grey.

Code
C-V400023




Closing cap
Material:plastic, colour:grey.

Code
C-V400019




Closing cap
Material:ABS Plastic, colour:black.

Code
C-V400020



Closing cap
Material:plastic, colour:grey.

Code
C-V400021



Closing cap
Material:ABS Plastic, colour:black.

Code
C-V400022

Ribbon HE 160 LEDs/m



Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI

		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400036</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>

Ribbon HE 160 LEDs/m



Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI

		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400037</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400041</u></p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code <u>98944</u></p>
		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code <u>98931</u></p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish Transp. Code <u>98904</u></p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p>Finish White Code <u>98901</u></p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Code <u>98921</u></p>
		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.</p>	<p>Code <u>83396</u></p>

Ribbon HE 160 LEDs/m



Ribbon HE 160 LEDs/m | LED Strip | Accessories
C00506WHNDI

		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 15,4 mm.</p>	<p>Code <u>83397</u></p>
		<p>Connector - Fast connector for Ribbon Plus 10mm - Ribbon PRO - Ribbon PRO 48V Length 21,6 mm.</p>	<p>Code <u>83398</u></p>
		<p>Connector Length 15,4 mm.</p>	<p>Code <u>83399</u></p>
		<p>Optics Light distribution: medium flood,Cover material: pc</p>	<p>Code <u>C-U100001</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100027</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100028</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100029</u></p>