




Downlights | 1 arrayLED 6 W DC 700 mA | CRI 90  
**C00935WHMFL**



56



### Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	downward
Nominal power	6 W DC
Source lumens	715 lm
Input voltage range	700mA
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (horizontal plane)	360 °
total angle (vertical plane)	35 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.17 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.128 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Powder coating

### Finishing flange

Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Powder coating

### Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Processing	Tumbling

### Electronics

- 

**99147**  
 On/Off Driver 198-264V AC (2 - 4 art.)

---

- 

**99735**  
 Multi Power 198-264V AC / 180-275V DC (1 art.)

---

- 

**99733**  
 1-10V Multi Power 198-264V AC / 180-275V DC (1 art.)

---

- 

**C-E100012**  
 Push and Simply Dim - DALI-2 Controller (1 art.)

---

- 

**C-E100016**  
 Push and Simply Dim - DALI-2 Controller (3 - 4 art.)

### Cables Electrification

Cable connector	No
-----------------	----

## Downlights | 1 arrayLED 6 W DC 700 mA | CRI 90 | Base C00935WHMFL


Single emission recessed downlights for indoor application. The super warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 715 lm, with a 119.2 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of powder coating. The ingress protection degree is IP44; the total weight is of 0.128 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6 W. The power supply cable is included and features a 0.17 m length.

The device features protection class III and can be ceiling-mounted, with a 56 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

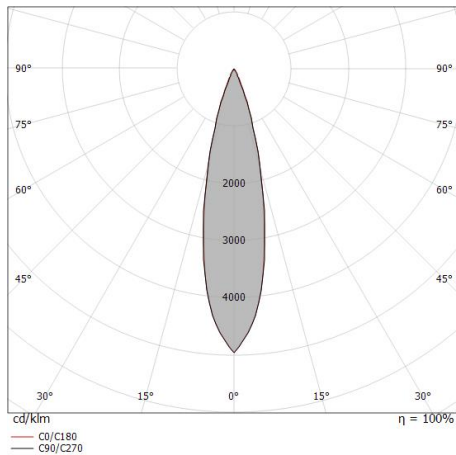

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.21	E(0°) 4386 E(C0) 2062
1.0	0.43	E(0°) 1096 E(C0) 516
1.5	0.64	E(0°) 487 E(C0) 229
2.0	0.86	E(0°) 274 E(C0) 129
2.5	1.07	E(0°) 175 E(C0) 82
3.0	1.29	E(0°) 122 E(C0) 57

Distance [m] Cone diameter [m] illuminance [lx]  
 — C0/C180 (Half-peak divergence: 24.2°)

### Energy efficiency class

This product contains a light source of energy efficiency class F.

### Illuminotechnical Features

Light Output Ratio (LOR)	30 %
Source lumens	715 lm
Delivered lumens	221 lm
Consumption	6 W
Luminaire efficacy	36 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

Standard Operating Ambient Temperature -20 / +50°C

Ordinary temperature on the glass 40°C

### LED Life / Failure Ratio

L70 B10 C0 134020h (at Tj 65 Ta 25 )

### UGR

UGR axial	5.7
UGR transversal	5.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	24°
Light distribution simmetry	Symmetrical