





Линейные элементы | 220-240 V | 6 x powerLED 12.2 W DC - 13.5 W AC | CRI 80  
81597M25



Single emission lines for outdoor application. The super warm white LED light source with a elliptical light distribution is composed of 6 powerLEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1692 lm, with a 138.7 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 13.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights or floor-mounted with an outer casing, code 98671 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

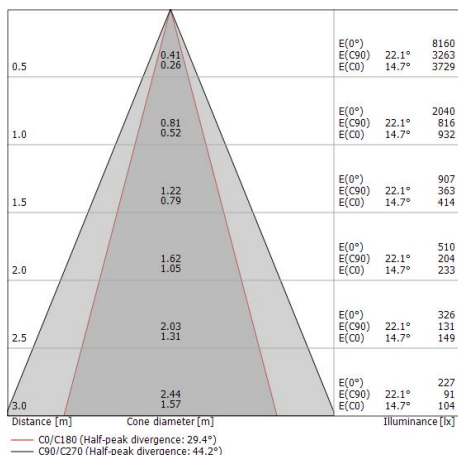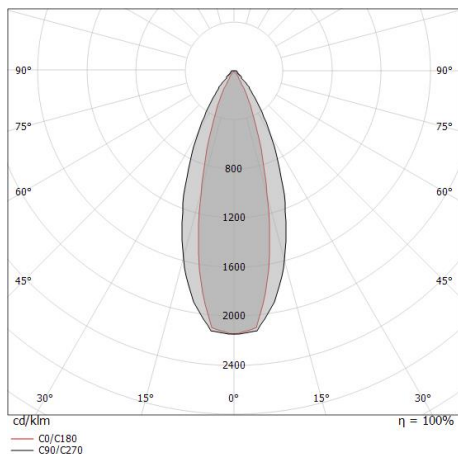

## Класс энергоэффективности

Этот продукт содержит источник света класса энергоэффективности D .

## Иlluminotechnical Особенности

Light Output Ratio (LOR)	56 %
Световой поток (источник)	1692 lm
Световой поток светильника	950 lm
Consumption	13.5 W
КПД светильника	70 lm/W
Температура цвета	2700 K
Standard Deviation of Colour Matching	1.5 Step MacAdam
Коэффициент цветопередачи	80 Ra

Стандартная температура рабочей среды	-20 / +50°C
Обычная температура стекла	40°C

## LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

## UGR

UGR axial	18.7
UGR transversal	6.9
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

## OPTICAL

Оптика C90/C270	44°
Оптика C0/C180	29°
Light distribution simmetry	Symmetrical 2 assis



		<p>Монтажный корпус Место установки: Стена, Пол; Тип установки: Стена из кладки L=356mm, H=138.3mm, D=100.2mm. Материал:Железо, Цвет:цинк, обработки :Цинкование.</p>	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Grey</td> <td>98671</td> </tr> </tbody> </table>	Finish	Code	Grey	98671
Finish	Code						
Grey	98671						
	<p>Кабель и соединитель Длина 5000 mm.</p>	<p>Code 99822</p>					
	<p>Кабель и соединитель Длина 1000 mm.</p>	<p>Code 99823</p>					
	<p>Кабель и соединитель Длина 5000 mm.</p>	<p>Code 99824</p>					
	<p>Кабель и соединитель Длина 10000 mm.</p>	<p>Code 99825</p>					
	<p>Кабель и соединитель Длина 1000 mm.</p>	<p>Code 99826</p>					