


Luminaire Code C00010DBMRD Name Buzzer Pro Bollards 6.5W DC Kit Relamping							
Measurem. Code RF_221109_03_5+ Name Buzzer Pro Bollards 6.5W DC Kit Relamping							
Luminaire Flux	153 lm	Luminaire Power	8.5 W	Efficacy	17.972 lm/W	Efficiency	100.00%
Source Flux	153 lm	Maximum value	221.67 cd/klm	Position	C=0.00 G=47.50	CG	Asymmetrical

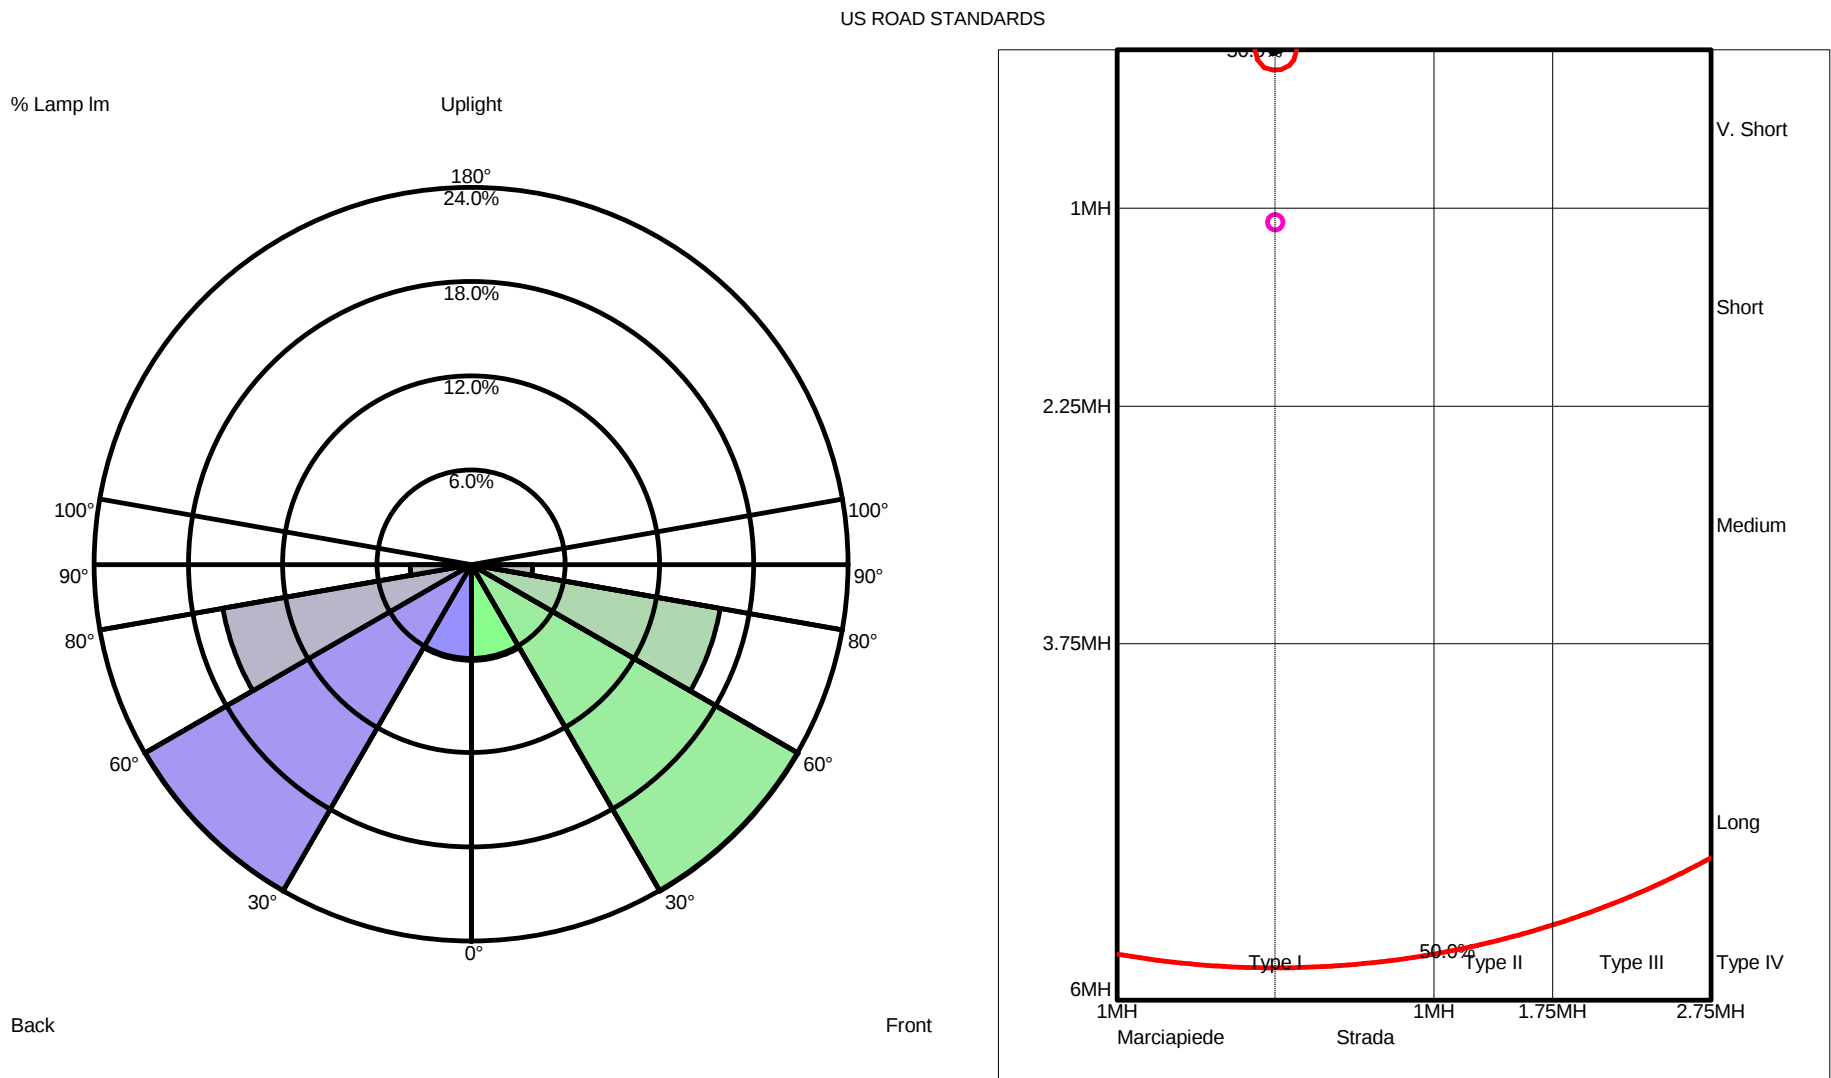

Luminaire Classification System (LCS)				
LCS Zone		Lumens	%Lamp	%Lum
FL	0° -- 30°	9.3 lm	6.1 %	6.1 %
FM	30° -- 60°	36.6 lm	24.0 %	24.0 %
FH	60° -- 80°	24.5 lm	16.1 %	16.1 %
FVH	80° -- 90°	6.0 lm	3.9 %	3.9 %
BL	0° -- 30°	9.3 lm	6.1 %	6.1 %
BM	30° -- 60°	36.6 lm	23.9 %	23.9 %
BH	60° -- 80°	24.5 lm	16.0 %	16.0 %
BVH	80° -- 90°	5.9 lm	3.9 %	3.9 %
UL	90° -- 100°	0.0 lm	0.0 %	0.0 %
UH	100° -- 180°	0.0 lm	0.0 %	0.0 %
TOTALS		152.8 lm	100.0 %	100.0 %
BUG B0 U0 G0 Type V Short Quadrilateral Symmetry				