


Luminaire
Code C00016BGASR
Name Buzzer Pro Bollards 9.3W DC DALI
Measurem.
Code RF_221116_03_5+
Name Buzzer Pro Bollards 9.3W DC DALI

Luminaire Flux	104 lm	Luminaire Power	11.0 W	Efficacy	9.419 lm/W	Efficiency	100.00%
Source Flux	104 lm	Maximum value	765.49 cd/klm	Position	C=85.00 G=72.50	CG	Sym. on planes 270-90

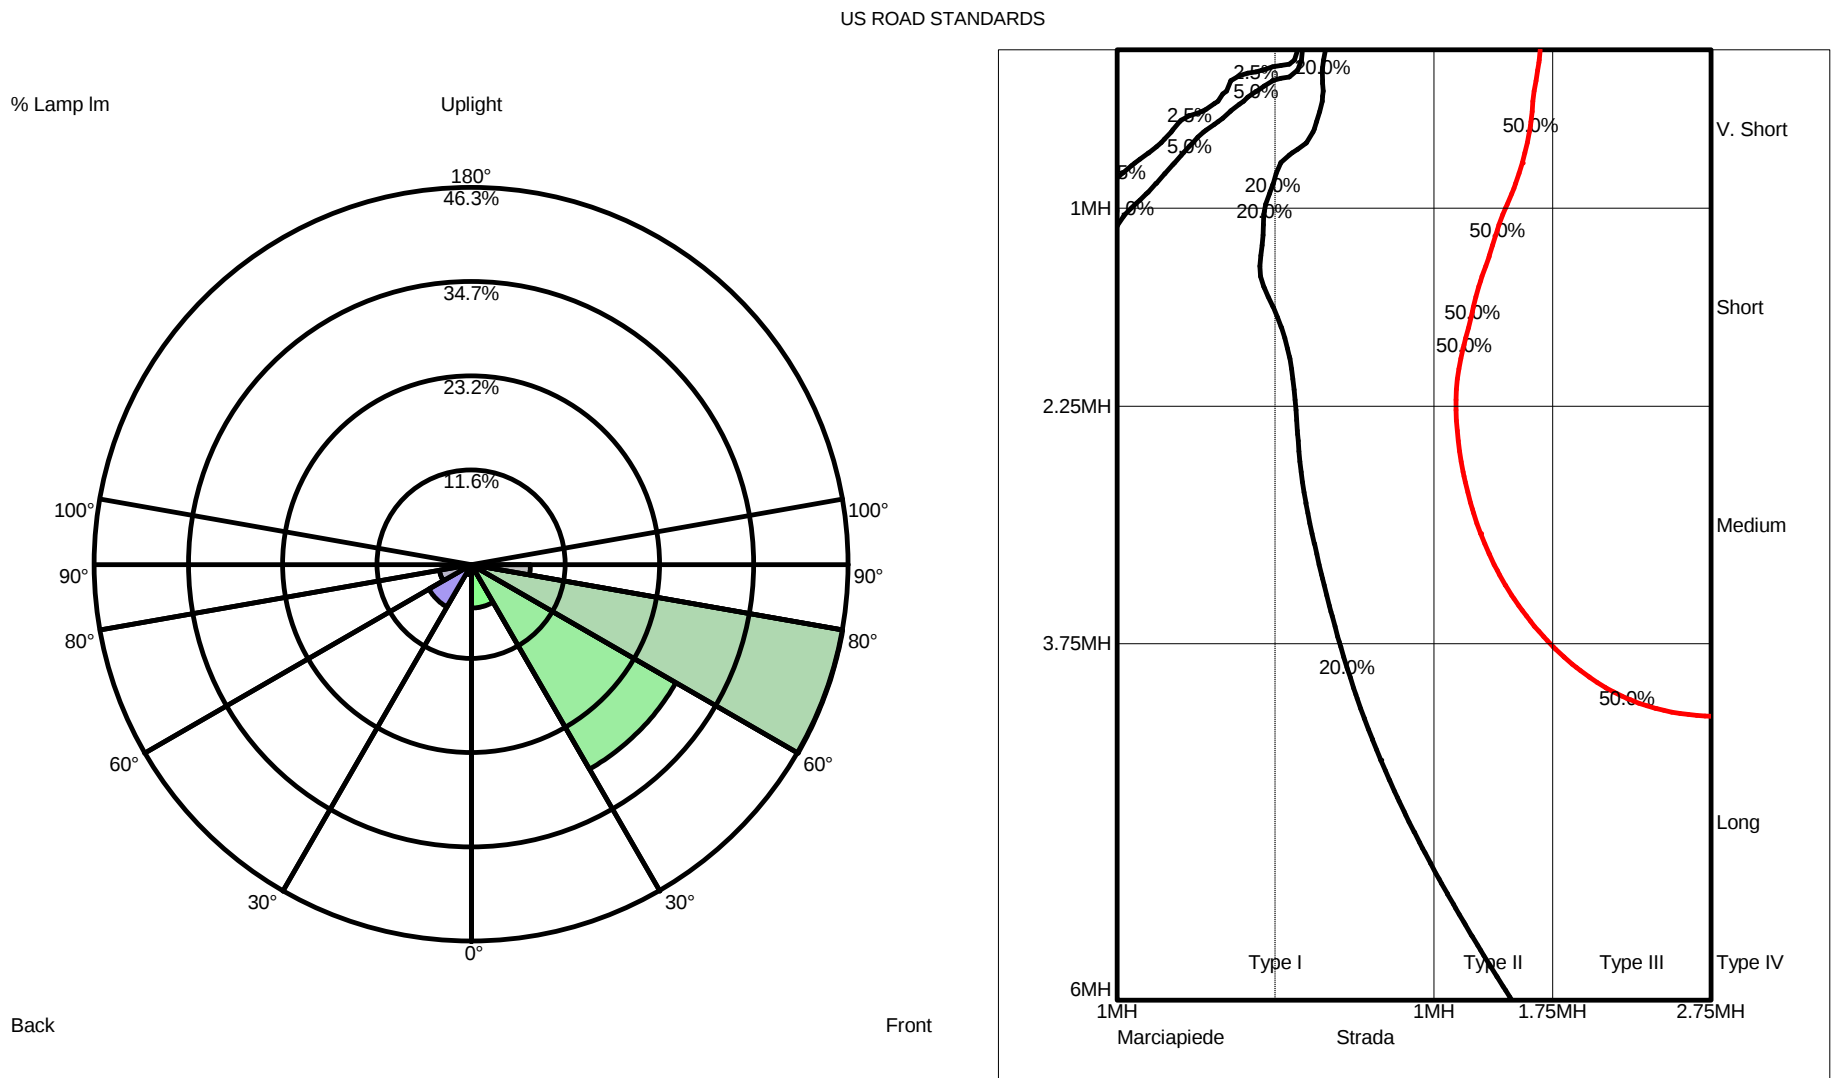

Luminaire Classification System (LCS)				
LCS Zone		Lumens	%Lamp	%Lum
FL	0° -- 30°	5.5 lm	5.3 %	5.3 %
FM	30° -- 60°	30.1 lm	29.0 %	29.0 %
FH	60° -- 80°	48.0 lm	46.3 %	46.3 %
FVH	80° -- 90°	7.5 lm	7.2 %	7.2 %
BL	0° -- 30°	1.3 lm	1.3 %	1.3 %
BM	30° -- 60°	6.2 lm	6.0 %	6.0 %
BH	60° -- 80°	4.1 lm	4.0 %	4.0 %
BVH	80° -- 90°	0.8 lm	0.8 %	0.8 %
UL	90° -- 100°	0.0 lm	0.0 %	0.0 %
UH	100° -- 180°	0.0 lm	0.0 %	0.0 %
TOTALS		103.6 lm	100.0 %	100.0 %
BUG B0 U0 G0 Type II Very Short Asymmetrical				